



Easy Steps For Multi-angle Cutting

多角度鋸切、快速便利

www.worldmax.com.tw

勝榆機械有限公司
SHENG YU MACHINERY CO., LTD.
42941 台中市神岡區大洲路175巷45號
No.45, Lane 175, Dazhou Rd., Shengang Dist.,
Taichung City 42941, Taiwan
Tel: +886-4-2522-0948 Fax: +886-4-2522-0648



QUICK, SAFE, CLEAN
ECONOMICAL
快速、安全、乾淨、經濟實惠

Metal Surface Grinding Machine

Deburring, Surface Grinding, Hair Line

金屬、非鐵金屬表面處理加工設備
去除毛邊、鏽板再生，髮線(拉絲、髮絲紋)處理

可用於研磨多種材料:

Suitable for various materials grinding:

金屬、木頭、塑膠、塑膠海綿Eva、
橡膠、防火板(耐火板)美耐板

Metal / Wood / Plastic / Eva (Ethylene-vinyl Acetate) / Rubber / HPL /
HPL (High Pressure Laminate), Fireproof Board, Melamine Board


勝榆機械有限公司前身為勝豐木工機械廠股份有限公司，長期深耕於木工機械專業領域，並累積了多年內、外生產銷售經驗；公司為因應廣大市場需求的轉變，已從早期製造各類木工機器進而跨行專研於製造各類金屬平面加工機械產業。各種金屬表面毛邊、髮絲線加工處理設備，表面處理設備從乾磨到溼磨，從手動到自動都有。

隨市場需求日新月異的轉變，勝榆機械積極從經驗中不斷的提昇金屬平面加工機械的品質，更透過客戶的反應與建議，積極投入更多心力於研發不規則形的金屬加工機種來滿足各種客戶群的需求，擴大領域服務更多國內、外的客戶群，堅持提供最優良品質及滿足顧客需求，亦仍不斷致力於產品的改進與創新研發，期能提供業界最先進完善的機械設備，為勝榆機械努力的方向。

A Brief Introduction To SHENG YU

Established in 1954, Sheng Yu Machine Co.,Ltd. has extensive experience in manufacturing and exports. We have experienced and remarkable sales and established high reputation in various fields. We also design and manufacture metalworking machinery, aluminum machining equipment, stone processing machinery, and other special purpose machinery. At Sheng Yu, we insist on "Superior Quality" and have a strong commitment to "Comprehensive Service". Based on our corporate philosophy - "Sincerity, Activeness, Perpetuity", we always strive hard to pursue the higher technology level and continued success. No matter what kind of machine or whole plant equipment, Sheng Yu always provides the quality and service you expect.

功能分類 CLASSIFICATION OF FUNCTIONS

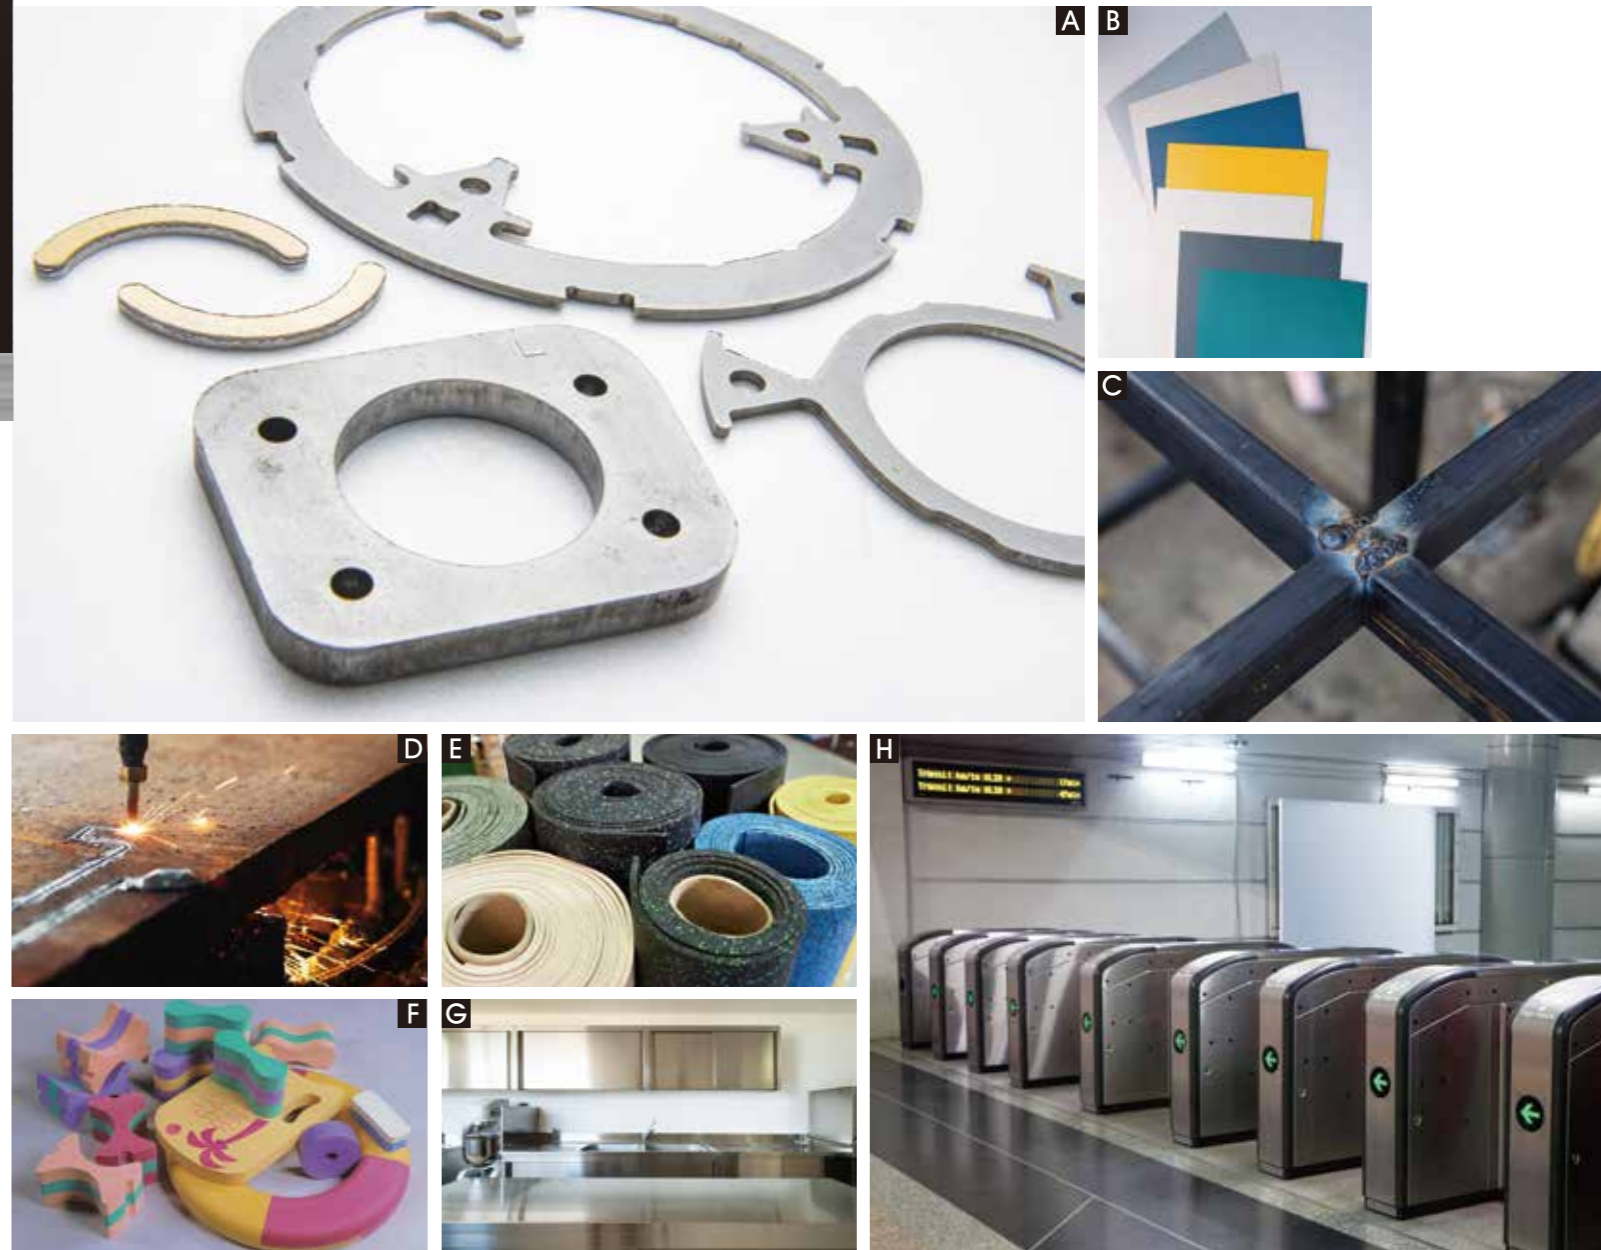


- A** 去毛刺(去毛邊): Deburring
- B** 防火板(耐火板)美耐板: HPL (High Pressure Laminate) Fireproof Board / Melamine Board
- C** 除渣: Heavy Slag Removal / Deslagging (Plasma Or Gas Cutting)
- D** 除鏽(除氧化物): Oxide Removal
- E** 橡膠地墊: Rubber Flooring
- F** 塑膠海綿: EVA (Ethylene-vinyl Acetate)
- G** 表面研磨: Polishing / Finish Grinding
- H** 表面研磨: Polishing / Finish grinding – Electrical Panel, Mailbox, Control Box
- 圓管: Round Tube

研磨 GRINDING / SANDING / FINISHING / POLISHING

形狀 SHAPE >>

平板金屬 / 成型箱 (電氣箱. 郵箱...) / 四方管 / 圓管 / 其他
Flat Sheet Metal / Box (Electrical Panel, Mailbox, Control Box) /
Square Tube / Round Tube / Other

金屬手壓砂光機 (拉絲機) HAND STROKE SANDER

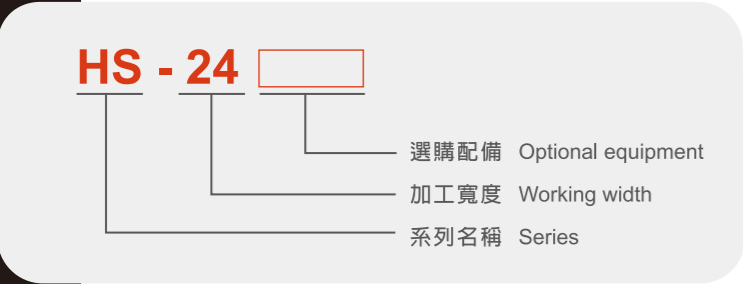

可加工工件 MACHINABLE WORKPIECE



機型	MODEL	HS-08ALH	HS-24	HS-36	HS-48
馬力	Power for sanding belt	2HP	3HP	5HP	5HP
砂帶尺寸	Sanding belt size	4" x 70"	4" x 158"	4" x 204"	4" x 250"
加工寬度	Capacity (max. width)	200 mm	1200 mm	1800 mm	2400 mm
加工高度	Capacity (max. thickness)	240 mm	270 mm	270 mm	270 mm
工作台面積	Table area	230 x 250 mm	48" x 24"	72" x 24"	96" x 24"
工作台高度	Table height from floor	890 mm	850 mm	850 mm	850 mm
線軌標準長度 可加工範圍	Machining range of linear guide standard length	-	1000 800 mm	1610 1400 mm	2220 2000 mm
線軌加長長度 可加工範圍 (選購)	Machining range of linear guide added length (optional)	-	1180 980 mm	1850 1600 mm	2340 2100 mm

選購配備

- A: 集塵斗
- B: 研磨刷盤
- S: 手臂式押板
- L: 線式滑軌押板
- H: 氣壓式半自動押板
- I: 變頻器裝置

OPTIONAL EQUIPMENT

- A: Dust bucket
- B: Brush
- S: Arm type pressure plate
- L: Linear motion guide pressure plate
- H: Pneumatic type semi-auto pressure plate
- I: Frequency inverter
- R: Rotating table
- V: Vacuum suction cup
- W: Water cooling (cooling device)
- ◎ dust collector
- ◎ Sanding belt

全自動氣壓式磨砂機 AUTOMATIC BELT GRINDING MACHINE



▲ AS-24



▲ RDB-06



▲ SV-106

▲ DH-206

機型	MODEL	AS-24
馬力	Motor	3 HP
左右伺服馬力	Right / left servo motor	400 W
前進後退伺服馬力	Forw. / back servo motor	400 W
砂帶尺寸	Sanding belt sizes	4" x 180" (100 x 4547 mm)
砂磨尺寸	Sanding sizes	1200 x 610 x 100 mm
工作台尺寸	Conveyor table sizes	1230 x 1070 mm
工作台高度	Height of conveyor table	850 mm
機械尺寸	Machine dimensions	L: 2200 x W: 2200 x H: 1670 mm

機型	MODEL	RDB-06
馬力	Motor	1HP
轉速	Sanding speed	1700 rpm
砂光磨頭數	Number of heads	2 (可旋轉 Capable to turn 180°)
工作台尺寸	Worktable size	1300 x 800 mm
通電磁盤工作平台	Magnetic work plate	470 x 360 mm, 附脫磁器 with demagnetizer x 1
工作半徑	Radius of working area	1350 mm
最大加工厚度	Max. processing thickness	200 mm
選購配件	Optional accessories	真空工作平台 (真空馬力: 3HP) Vacuum table (vacuum motor power: 3HP)

Sander Machine 磨砂機

機型	MODEL	SV-106	DH-206
砂帶轉速	Sanding belt speed	1160 rpm	1400 rpm
砂帶尺寸	Sanding belt sizes	6" x 62"	6" x 94"
砂磨尺寸	Sanding size	6" x 4"	6" x 24"
工作台高度	Table height from floor	920 mm	760 mm
馬力	Motor	1HP	2HP

機型	MODEL	TWF-620P
拋光馬力	Polishing Motor	5HP
拋光轉速	Polishing speed	1720 rpm
震盪馬力	Oscillate motor	150W
輸送馬力	Feeding motor	1HP
拋光輪規格	Polishing wheel specifications	300 mm (12") x 3/1"
最大加工尺寸	Max. Capacity	L: 500 x W: 200 x H: 180 mm

金屬自動磨砂機(輸送式) AUTOMATIC BELT GRINDING MACHINE

金屬自動磨砂機(上下磨) AUTOMATIC BELT GRINDING MACHINE



▲ MS-106

▲ MS-206


▲ MS-306




▲ MS-406

機型 MODEL	MS-106	MS-112	MS-206	MS-212	MS-306	MS-312	MS-406	MS-412
加工規格 Capacity (W x H x L)	200 x 80 x ∞	340 x 80 x ∞	200 x 80 x ∞	340 x 80 x ∞	200 x 80 x ∞	340 x 80 x ∞	200 x 80 x ∞	340 x 80 x ∞
主軸馬力 Power for Sanding Belt	10HP		10HP x 2		10HP x 3		10HP x 4	
輸送帶馬力 Power for Feeding	DC 1HP		DC 2HP		DC 2HP		DC 3HP	
泵浦馬力 Power for Pump	1/4HP		1/4HP (Optional 1/2HP)		1/2HP		1HP	
研削速度(變頻器) Sanding Speed (Freq. Inverter)	900~1800 rpm		900~1800 rpm		900~1800 rpm		900~1800 rpm	
送料速度 Feeding Speed	1~8 m/min		1~8 m/min		1~8 m/min		1~8 m/min	
砂帶規格 Sanding Belt Size	70" x 8"	72" x 13"	70" x 8"	72" x 13"	70" x 8"	72" x 13"	70" x 8"	72" x 13"
輸送帶規格 Conveyor Belt Size	130" x 8"	155" x 13"	236" x 8"	236" x 13"	272" x 8"	272" x 13"	308" x 8"	308" x 13"

選購配備 OPTIONAL EQUIPMENT



押板
PAD

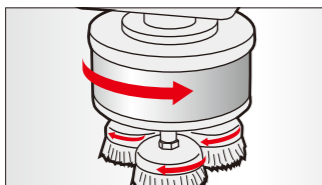

旋轉刷盤(去毛邊)
Rotating brushes (Deburring)

- 昇降數值控制器
Elevation controller
- 鈹金-不鏽鋼
Sheet metal - Stainless steel appearance
- 集塵機(乾磨)
Dust collection system (Dry sanding)


- 不織布輪
Non-woven abrasive wheel
- 鋼絲輪
Wire wheels

▶ MSUD-406

磨砂頭部組合
Various sanding heads configuration



▼ MS-12-2S2B

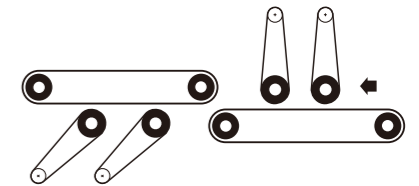

機型 MODEL	MSUD-406	MS-12-2S2B
加工規格 Capacity (W x H)	150 x 100 mm (最短長度 Min. length: 300 mm)	300 x 90mm x (長度 length: ∞)
研磨馬力 Brush Motor	-	1.5 KW x 2 & 0.4 KW x 2
主軸馬力 Power for Sanding Belt	10HP x 4 (變頻器 inverter)	10HP. 變頻器 INVERTER (10HP)
輸送馬力 Power for Feeding	DC 1HP x 2組, 1/2 x 1組	DC 5HP
輸送帶規格 Conveyor Belt Size	8" (W) x 180" x 2組	13" x 308"
砂帶規格 Sanding Belt Size	8" x 83"	13" x 72"

金屬自動磨砂機(乾式/輕型)

AUTOMATIC BELT GRINDING MACHINE-DRY LIGHT DUTY



機型 MODEL	MS-106D-2.0
加工規格 Capacity (W x H)	150 x 50 mm
主軸馬力 Power for Sanding Belt	3HP
輸送馬力 Power for Feeding	AC 1HP
輸送帶規格 Conveyor Belt Size	8" x 88"
砂帶規格 Sanding Belt Size	8" x 70" (200 x 1780 mm)

金屬自動磨砂機 AUTOMATIC BELT GRINDING MACHINE




▲ MDA-3775

進料最短長度：400 mm
壓料滾輪：進出雙壓料滾輪
主軸馬力附碟煞裝置

Shortest length of feeding: 400 mm
Feeding roller: Infeed & outfeed rollers.
Spindle motor complete with disc brake.

磨砂頭部組合 VARIOUS SANDING HEADS CONFIGURATION

加工寬度：600 / 900 / 1200 mm

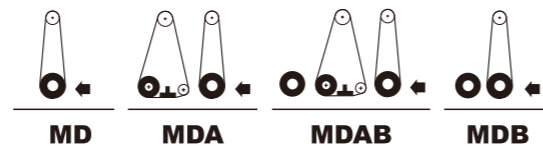

機型	MODEL	MD-2575	MD-3775
主軸馬力	Sanding Motor	20HP	
輸送馬力	Conveyor Motor	DC 1HP	
昇降高度	Elevation Motor	1/2 HP	
砂磨寬度	Sanding Width	600 mm	915 mm
昇降高度	Elevation Height (Max.)	170 mm	
送料速度	Feeding Speed	1~11 m/min	
砂帶尺寸	Sanding Belt Size	25" x 75"	37" x 75"

選購配備

- 循環式污水紙帶過濾機一組
- 氣刀吹乾設備一組
- 主體結構外鍍金不鏽鋼
- 集塵機(乾磨)
- 不織布輪

OPTIONAL EQUIPMENT

- A set of circle type polluted water paper filter machine.
- A set of drying equipment.
- Body structure: sheet metal stainless steel
- Dust collection system (Dry sanding)
- Non-woven abrasive wheel


平面往復式金屬磨砂機 AUTOMATIC BELT GRINDING MACHINE



▲ TWF-624




▲ TWF-2050



TWF-624

- 可作髮線加工
Applicable for short grain machining
- 髮線
Hair line



PTWF-624

- 可作髮線及長絲兩種加工
Applicable for both short and long grain machining


選購配備

a: TWF^R / PTWF^R

R: 工作桌面擺動
Working table oscillate

機型	MODEL	TWF / PTWF-624	TWF-2050
主軸馬力	Motor	10HP	15HP
變頻器	Inverter	10HP	15HP
油壓馬力	Hydraulic Motor	2HP	2HP
加工寬度	Width Capacity	200 mm	500 mm
加工長度	Length Capacity	610 mm	1300 mm
工作平板	Table Area	300 x 640 mm	500 x 1400 mm
砂帶規格	Sanding Belt Size	200 mm x 70" / 200 x 2100 mm	500 mm x 75"

機型	MODEL	MDWF-13138S
加工規格	Capacity	W:330 mm L:3500 mm
砂帶馬力	Motor	15HP / 變頻器(15HP)
工作台馬力	Hydraulic motor	DC-2HP
砂帶規格	Sanding Belt Size	13" (340) x 72"

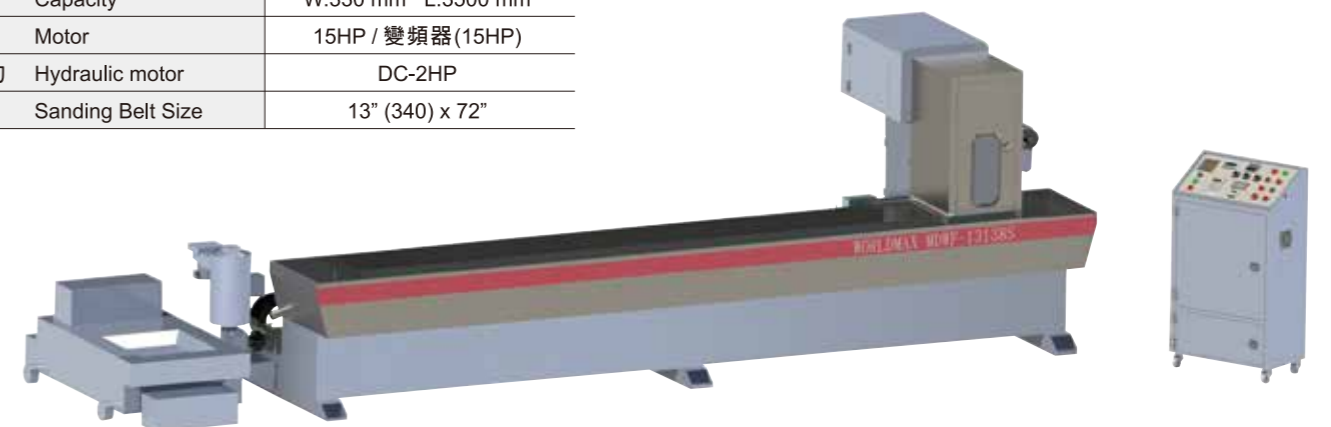



▲ MAH-60S3

Automatic Copy Shaper With Three Sanding Spindles 金屬自動仿型磨砂機

機型	MODEL	MAH-60S3	MAH-60S4
圓型鉋削直徑	Workpiece diameter	1000~1400 mm	1000~1400 mm
砂光主軸馬力	Sanding spindle motor	2 HP x 3	2 HP x 4
砂帶偏擺	Sanding belt oscillation	氣動式 Pneumatic	氣動式 Pneumatic
砂帶尺寸	Sanding belt sizes	5" x 70"	5" x 70"
工作台直徑	Table diameter	ø1068 mm	ø1068 mm
圓盤馬達	HP. of table motor	DC 2HP 0-3 m/min	DC 2HP 0-3 m/min
導輪直徑	Guide wheel diameter	ø110 mm	ø110 mm



泡棉EVA



◀ AH-301B

Automatic Copy Shaper 自動仿型磨邊機

機型	MODEL	AH-301B
主軸馬力	Main spindle motor	10 HP
主軸轉速	R.P.M of cutter head	6000 rpm
加工高度	Cutting height	180 mm
圓形加工直徑	Workpiece diameter	ø3"~30"
最大方形尺寸	Max. square	21"
長方形比例	Max. rectangle ratio	2:1
工作台直徑	Table diameter	ø23"
工作台轉速	R.P.M. of table infinitely	0~3 m/min (DC 1HP)

Curved Sanding Machine 金屬圓棒磨砂機

機型	MODEL	SY-2S-160
最大加工直徑	Max. work diameter	120 mm (對角線 Diagonal)
最小加工直徑	Min. work diameter	10 mm
最短加工長度	Min. work length	350 mm
砂帶尺寸	Sanding belt size	76 x 1270 mm
砂光座	Sanding head number	1座
砂光馬力	Sanding belt motor	3 HP (變頻器 Inverter)
送料座	Feeding head number (Conveyor drive)	2座
送料馬力	Feeding motor	1/4 HP x 2 (變頻器 Inverter)




◀ SY-2S-160


Round Rod Sanding Machine 圓棒磨砂機

機型	MODEL	SY-602B	SY-604B
加工範圍	Range of work diameter	ø10 to ø60 mm	ø10 to ø60 mm
加工長度範圍	Range of work length	200 mm ~ Unlimited	200 mm ~ Unlimited
使用馬力	Head drive motor	5 HP	5 HP (7.5 HP OP.)
風車馬力	Vaccum suction motor	1/2 HP	1/2 HP
砂帶規格	Sanding belt sizes	125 x 1860 mm (5" x 73")	63.5 x 1860 mm (2-1/2" x 73")
砂帶速度	Belt speed	18 M/sec	18 M/sec
送料速度	Feed speed	6~20 m/min	4~15 m/min

所有機種皆適用於磨砂機鐵管、銅管...等。
All models are applicable for sanding steel pipe and bronze pipe, etc.



雙帶磨砂機
Double-Belt Sander



四帶磨砂機
Four-Belt Sander


▲ SY-604B



▲ SDL-52~72

特點 OUTSTANDING FEATURES

- 薄板厚度最薄可達0.4 mm。
- 砂光精度可達±0.03 mm。
- Minimum thickness of workpiece is up to 0.4 mm.
- Height sanding accuracy in ± 0.03 mm.



Bottom Type Wide Belt Sander (Hpl-laminate Sheet) 底磨寬帶砂光機 (拉毛機)

機型	MODEL	SDL-52	SDL-62	SDL-72
磨砂寬度	Sanding width	48" (最寬: 52")	60" (寬: 62")	72" (最寬: 72")
主馬力	Main motor (standard)	50 HP	60 HP	75 HP
輸送馬力	Feeding motor	3 HP	5 HP	5 HP
昇降馬力	Table hoist motor	1 HP	2 HP	2 HP
棕刷馬力	Brushing roller motor	1/4 HP	1/4 HP	1/4 HP
送料速度	Feeding speed	14M x 48 m/min (每分鐘 Variable)		

Bottom Type Wide Belt Sander (Rubber Sheet / Rubber Flooring) 橡膠板底部砂磨機 (橡膠墊)

機型	MODEL	SRU-7580
砂帶	Sanding belt (W x L)	75" x 80"
主軸馬力	Sanding motor	60 HP x 4P
輸送馬力	Feeding motor	2 HP x 4P (變頻器 Inverter) 上中間: x 1組 / 上前後: x 2組
昇降馬力	Elevation motor	1 HP x 6P
棕刷馬力	Brushing roller motor	1 HP x 4P
送料速度	Feeding speed (Variable)	0~40 m/min
砂帶轉速	Sanding speed	1455 rpm/min



▲ SRU-7580

Bag Filter Dust Collector 袋式集塵機

機型	MODEL	SF-2093	SF-060
馬力	Motor	3 HP	5 HP (Opt. 7.5HP)
吸風口	Air suction port	4" x 3 Holes	5" x 2~5 Holes
風量	Air flow	45 M³/min	182 M³/min
風速	Air speed	22~25 M/sec	43 M/sec



▲ SF-2093

▲ SF-060

自動定寸系統 AUTOMATIC POSITIONING SYSTEM



▲ SY-ATS

The automatic positioning system combined with any kind of working machines allows for auto-positioning and auto-cutting (such as sawing machine, drilling machine, punching machine.)

特點 OUTSTANDING FEATURES

- 自動定位、鋸切。
- 料架長度(選購)：最長6.5公尺。(實際測量長度6公尺)。
- Automation postioning and cutting.
- Length of roller: Optional 6.5 m max. (The actual length measured is 6 m)

機型	MODEL	SY-ATS
觸控螢幕	Touch-sensing screen	7"
伺服馬達	Servo motor	400 w
常用記憶模組	Frequently used memory module (PLC)	100 組
定位速度	Position speed	20-25 m/min
定位精度	Position accuracy	±0.15 mm


Roller Stand 單支跨料架

- 最高 Max. height: 1060 mm
- 最低 Min. height: 670 mm



Saw Blade 鋸片

- 鋸片尺寸 Size of aluminum sheet: 10", 12", 14", 16", 18", 24" 36"
- 鋸片鋸齒 Saw blade teeth: 60T, 80T, 100T, 120T

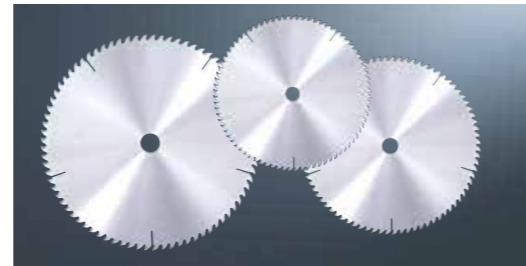

圓盤式油壓沖床 HYDRAULIC PUNCHING MACHINE



▲ SDC-810

特點 OUTSTANDING FEATURES

- 圓盤上放置四模組，減少人工搬運。
- 4 sets of mold placed on the disc to decrease manual movement.

機型	MODEL	SDC-810
油壓馬力	Hydraulic motor	5 HP
沖壓能力	Punching force	7 tons
油壓行程	Stroke	150 mm
模具高度	Punching height	250 mm
模具數量	Mold number	4 pieces or 5 pieces
工作台面積	Table area (L x W x H)	500 x 250 x 250 mm
工作台面離地高度	Table height	740 mm
油壓壓力	Hydraulic	150 kg/cm ²

高速油壓沖床 HIGH SPEED HYDRAULIC PUNCHING MACHINE



▶ AP-230

特點 OUTSTANDING FEATURES

- 噪音小、沖模力大。
- 手動裝置，方便校膜，提高生產效率，不需購置多台沖床，減少成本。
- 容易操作、安全性高。
- Low noise, great punching strength.
- Manual device makes it easy to adjust the mould and increase productivity.
- Easy to operate and high safety.


機型	MODEL	AP-230
油壓馬力	Hydraulic motor	3 HP (5 HP OP.)
沖壓能力	Punching force	8 tond (10, 15, 20 tons OP.)
油壓泵流量	Hydraulic pump displacement	9 cc (12, 14 cc OP.)
油壓缸	Hydraulic cylinder	80 x 150 mm
油壓缸上升速度	Hydraulic cylinder raising speed	1.8 / 83 mm/sec
油壓缸下降速度	Hydraulic cylinder lowering speed	3.4 / 44 mm/sec
工作台面積	Table area (L x W x H)	500 x 250 x 250 mm
工作台面離地高度	Table height	710 mm
行程	Stroke	150 mm
沖壓壓力	Hydraulic pressure	150 kg/cm ²

雙鋸裁斷機(上下鋸)

DOUBLE SAWBLADE CUTTING MACHINE (TOP & BOTTOM SAW)



▲ DS-18100



上下鋸可單獨作業或同時作業
Top and bottom saws can operate individually or simultaneously.

機型	MODEL	DS-18100
鋸切高度	Cutting height	280 mm
鋸切寬度	Cutting width	1000 mm
使用鋸片	Sawblade size	1" x 18"
上鋸馬力	Top saw motor	10 HP
下鋸馬力	Bottom saw motor	10 HP
油壓馬力	Hydraulic motor	5 HP

自動油壓鋸料機

AUTO HYDRAULIC CUT OFF SAW




▲ OL-18

特點 OUTSTANDING FEATURES

- 隱藏式鋸片低噪音、安全性高。
- 腳踏式開關，可自動壓料、鋸料。

- Hidden saw blade, low noise, and high safety.
- Automatic workpiece clamping and cutting off operations are controlled by a foot switch.



機型	MODEL	OL-600	OL-18
鋸切角度	Cutting angle	90°	90°
鋸片尺寸	Saw blade size	ø1" x ø24"	ø1" x ø18"
鋸切高度	Height of cut	200 mm	100 mm
鋸切寬度	Width of cut	450 mm	270 mm
工作台高度	Table height	850 mm	850 mm
主軸馬力	Spindle motor	7.5 HP (Opt. 10 HP)	7.5 HP (Opt. 10 HP)
油壓馬力	Hydraulic motor	1 HP	1 HP

萬能圓鋸機

UNIVERSAL CIRCULAR SAW



▲ SB-14H

特點 OUTSTANDING FEATURES

- 可鋸切任何角度。
- 適用：鋁門窗框、鋁擠型、木材、塑膠、電木板等。
- For any cutting angle.
- Suitable for: aluminum door and window frames, aluminum extrusion, wood plastic, bakelite, acrylonitrile butadiene styrene plastic.

機型	MODEL	SB-14H
鋸切角度	Cutting angle	0°~45° mm
鋸片尺寸	Saw blade size	ø1" x ø14" x 120T
最高鋸切高度	Max. height of cut	100 mm
主軸轉速	Spindle RPM	3400 ~ 4500 rpm
工作台面積	Table area	720 x 790 mm
工作台高度	Table height	830 mm
馬達	Motor	2 HP
機械尺寸	Machine dimensions	800 x 850 x 850 mm
裝箱尺寸	Packing dimensions	900 x 950 x 1050 mm
淨重/毛重	N.W. / G.W.	220 / 300 kgs

圓盤角度鋸料機

ROTARY TABLE ANGULAR CUTTING MACHINE



機型	MODEL	ART-400	ART-500
鋸切角度	Cutting angle	+30°~ 90°~ -30°	
馬力	Motor	3 HP	5 HP
主軸轉速	Spindle speed	3000 rpm	
工作台尺寸	Table area	820 x 465mm	1020 x 555mm
工作台高度	Table height from floor	860 mm	
鋸片	Sawblade	16" x 1 pcs	20" x 1 pcs


配件：鋸片 x 1組。
Accessories: Sawblade x 1 Pcs

45°切角機

45° DOUBLE MITER CUT-OFF SAW

特點 OUTSTANDING FEATURES

- 雙刀式同步鋸切，較一般鋸切可節省2/3時間。
- 上下前後均使用汽缸夾緊，材料穩固，不變形，鋸切角度才會準確。
- 內置兩組，四個噴油器提供鋸片適當潤滑，鋸切時自動噴油延長鋸片使用壽命長。
- Double sawblades cut simultaneously providing 2/3 time saving than conventional cutting.
- Four sides clamping by air cylinders assures secure clamping, deformation free and accurate angle of cut. Equipped with 12cm rubber clamping pad to avoid damage.
- Four lubrication nozzles gives outstanding lubrication performance. Lubricant flushes only when cutting is performing for extending service life of sawblade.

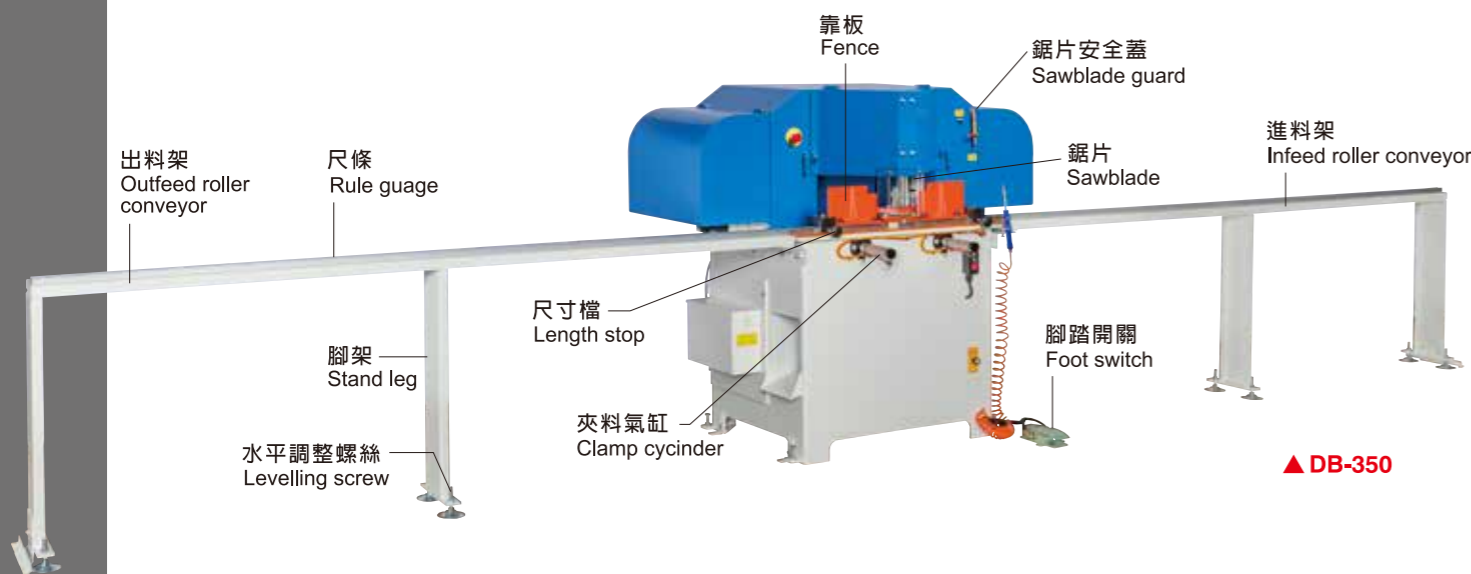


▲ DB-350

DB-350 鋸切能力 CUTTING CAPACITY

鋸片Ø14"


- 60 x 180 mm
- 70 x 150 mm
- 80 x 120 mm

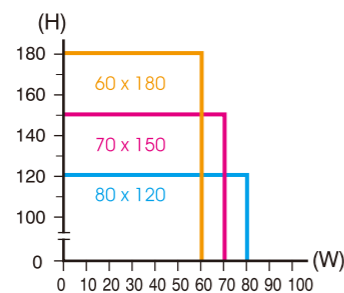


DB-455 鋸切能力 CUTTING CAPACITY

鋸片Ø18"

- 70 x 250 mm
- 100 x 180 mm
- 150 x 130 mm

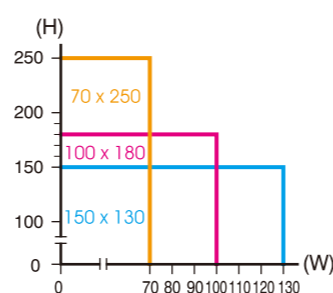


機型	MODEL	DB-350	DB-455
鋸切角度	Cutting angle	45°	45°
鋸片尺寸	Saw blade size	ø1" x ø14"	ø1" x ø18"
工作台面積	Table area	870 x 260 mm	870 x 290 mm
工作台高度	Table height	800 mm	800 mm
馬力	Motor	2 HP x 2	3 HP x 2
所需空氣壓力	Air pressure	6 kg / cm ²	6 kg / cm ²
主軸轉速	Spindle RPM	3300 rpm	3300 rpm
最大鋸切寬度	Max. width of cut	100 mm	130 mm
最大鋸切高度	Max. height of cut	180 mm	250 mm



標準配備240 x 15 cm 料架一組。
Standard equipment with 1 set of 240 x 15cm conveyor table.

自動鋸料機



AUTO CUT OFF SAW

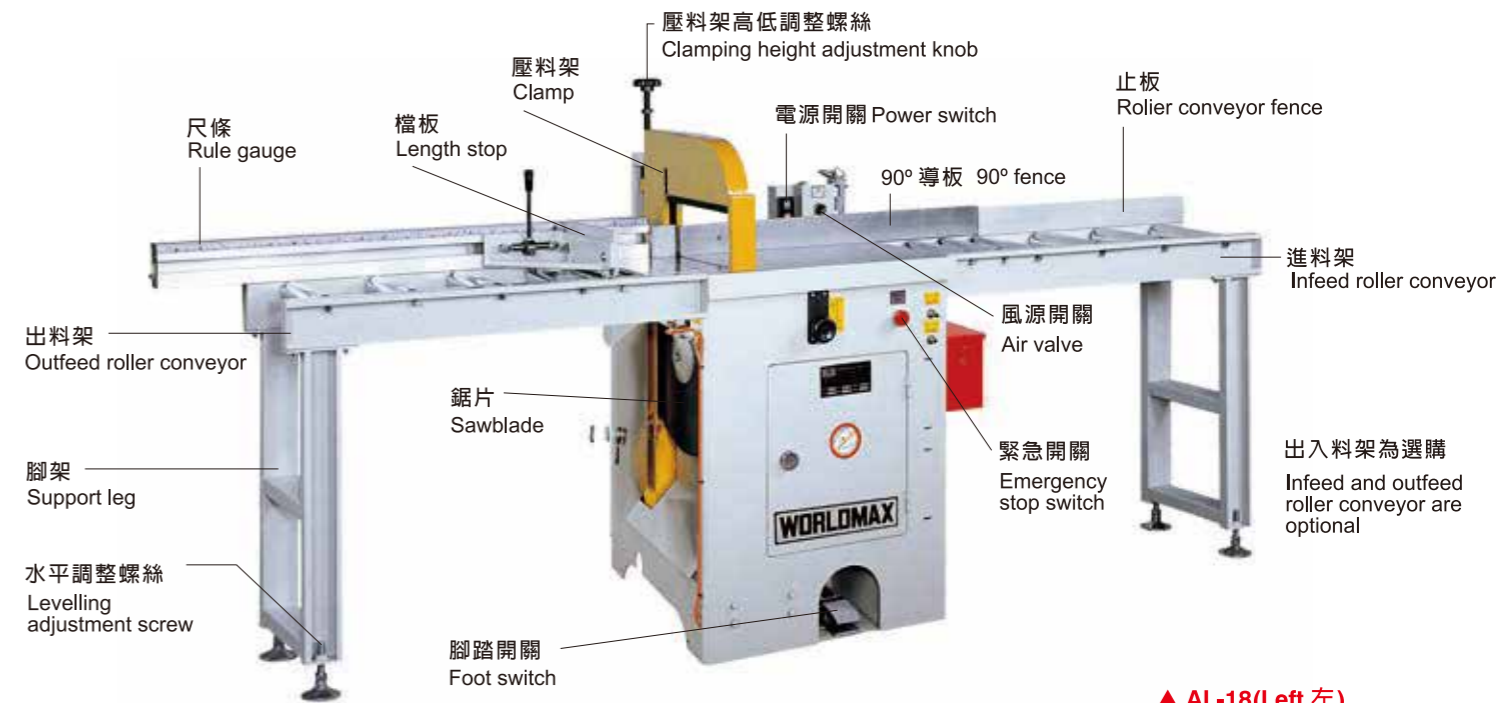

▲ AL-18(Left 左)

鋸切能力 CUTTING CAPACITY (H x W)

- 135 x 200 mm
- 100 x 225 mm
- 75 x 250 mm
- 50 x 275 mm
- 25 x 300 mm

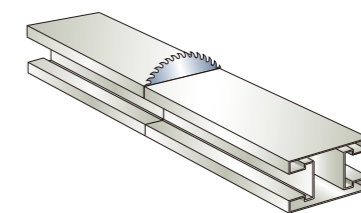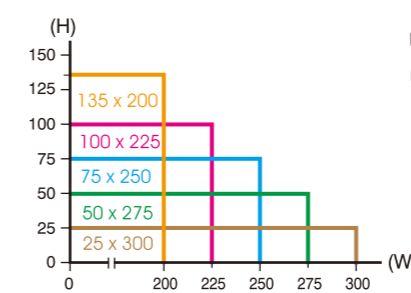

選購配備



▲ SY-ATS

機型	MODEL	AL-18 / AR-18
鋸切角度	Cutting angle	45° & 90°
鋸片尺寸	Saw blade size	ø1" x ø18"
鋸切高度	Height of cut	135 mm
鋸切寬度	Width of cut	300 mm
工作台高度	Table height	850 mm
主軸馬力	Spindle motor	3 HP (5 HP / 75 HP OP.)



定寸擋板
Length stop



定寸液晶數字顯示器(選購)
LED for cut to size (optional)


金自動油壓鋸料機 FULLY AUTO CUT OFF SAW




▲ OLA-1812

特點 OUTSTANDING FEATURES

- 鋸切方式：直線往復式線性滑軌油壓缸推進。
- 自動送料機：全自動油壓送料系統。
- CUTTING FEED: Linear reciprocating motions. Moves on linear guide ways. Hydraulic drive.
- AUTOMATIC FEEDER: Fully automatic hydraulic feed system.



OLA-1812 鋸切能力 CUTTING CAPACITY

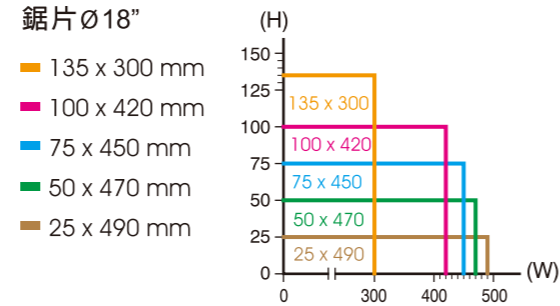


自動鋸料機 AUTO CUT OFF SAW




▲ OL-1812

特點 OUTSTANDING FEATURES


- 隱藏式鋸片，低噪音，安全性高。
- 可單支或多支一起鋸切。
- 入料導板可提高鋸切精度。
- Built-in sawblade for low noise and safety operation.
- Foot switch provides automatic clamping and cutting operations.
- Single or multiple workpieces can be cut at a time.



OL-1812 鋸切能力 CUTTING CAPACITY

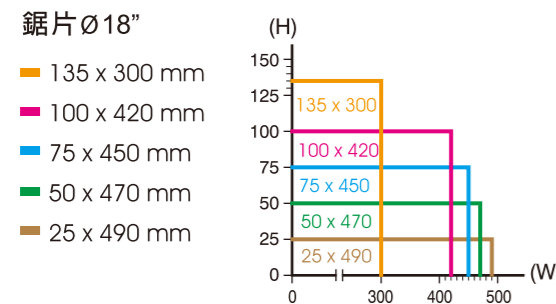

OL-2416 鋸切能力 CUTTING CAPACITY

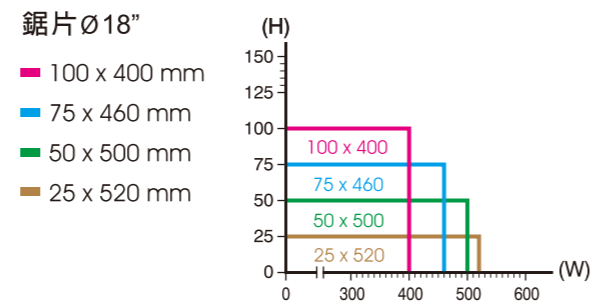

機型	MODEL	OLA-1812	OL-1812	OL-2416
送料行程	Feeding movement	0~500 mm	-	-
鋸切角度	Cutting angle	90°	90°	90°
鋸片尺寸	Saw blade size	ø1" x 18"	ø1" x 18"	ø1" x 18" / (ø24")
鋸切高度	Height of cut	130 mm	135 mm	100 mm / (200 mm)
鋸切寬度	Width of cut	200 mm (Opt. 310, 380, 600 mm)	300 mm	400 mm / (400 mm)
工作台高度	Table height	850 mm	850 mm	850 mm
主軸馬力	Spindle motor	10 HP	10 HP	10 HP
油壓馬力	Hydraulic motor	2 HP	2 HP	2 HP

本公司對產品規格、設計特性均不斷研究改進，目錄規格若有變更，恕不另行通知。
All specifications, dimensions and design characteristics shown in this catalogue are subject to change without prior notice.

可用於鋸切多種材料：
Suitable for various materials cutting:

鋁、鋁擠型、木頭、塑膠、銅
Aluminum / Aluminum Extrusion / Wood / Plastic / Copper

鋸切 CUTTING



EASY STEPS FOR MULTI-ANGLE CUTTING
多角度鋸切、快速便利

冲孔 PUNCHING

材質 MATERIAL

鋁 / 鋁擠型
Aluminum / Aluminum Extrusion